


Substance g/m ²	Thickness micron	Bulk cc/gm	L & W Bending Resistance, mN		
			MD	CD	GM
T 410	T 411		T 556		
180	207	1.15	65	33	46
190	219	1.15	78	39	55
200	236	1.18	92	46	65
210	248	1.18	106	53	75
220	260	1.18	120	60	85
230	271	1.18	134	67	95
240	283	1.18	148	74	105
250	300	1.20	162	81	115
Tolerance : ± 3%		± 4%	±15%		

Properties		UOM	Value	Standards
Edge Wick Top		Kg/m ² /hr	1.0	
Roughness (PPS) Top	180 - 250	μ	1.3 ± 0.2	T 555
IGT Dry Pick (MV)	Top	m/s	1.2 ± 0.2	ISO 3782
Gloss at 75°, min	Top	%	40	T 480
ISO Brightness	Top	%	85 ± 2	ISO 2470
Scott Ply Bond		j/m ²	>150	T 569
Cobb ₆₀	Top	g/m ²	30 ± 5	T 441
	Back		40 ± 5	
Moisture	180 - 250	%	6.0 - 7.0	T 412
Shade		-	Natural	As Per Standard

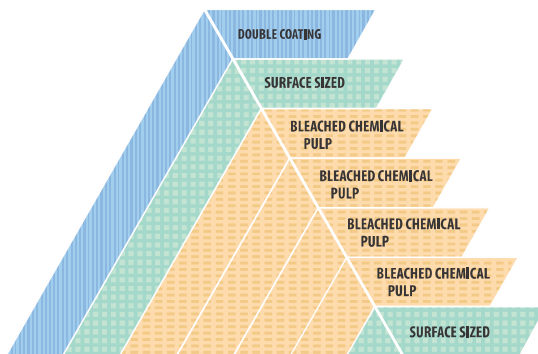

CERTIFICATIONS & COMPLIANCES:
Manufacturing: ISO 9001, ISO 14001, OHSAS 18001 and FDA
Environmental: FSC COC and ECF.
Regulatory: REACH & ROHS
NOTE:
Test Conditions: Temperature 23 ± 1°C & Relative Humidity 50 ± 2%. (Tappi 402)
All Parameters are measured as per the relevant Tappi & ISO standards.

Being a dynamic organization, Century Pulp & Paper continuously evolving in response to customer requirement. The specification in this product catalogue are therefore subject to change. To learn more about our upgraded specification sheet contact: cppdel@centurypaper.org.in

