


Substance g/m ²	Thickness micron	Bulk cc/gm	L & W Bending Resistance, mN		
			MD	CD	GM
T 410	T 411		T 556		
230	265	1.15	101	51	72
250	275	1.10	130	65	92
270	284	1.05	140	70	99
280	288	1.03	150	74	105
290	290	1.00	155	78	110
300	279	0.93	172	86	122
Tolerance : ± 3	± 3		±15%		

Properties		UOM	Value	Standards
Roughness (PPS) Top	Top	μ	1.2 ± 0.2	T 555
	Back		4 ± 0.5	
Bendtsen Smoothness	Top	ml/min	10.0	T 479
	Back		140.0	
IGT Dry Pick (MV)	Top	m/s	1.2 ± 0.2	ISO 3782
Gloss at 75°, min	Top	%	45 min	T 480
	Back		20 min	
ISO Brightness	Top	%	88 ± 1	ISO 2470
CIE Whiteness, min	Top	%	120 min	ISO 11475
Scott Ply Bond		j/m ²	>150	T 569
Cobb ₆₀	Top	g/m ²	35 ± 5	T 441
	Back		35 ± 5	
Moisture		%	6.0 - 7.0	T 412
Shade		-	Light Bluish	As Per Standard

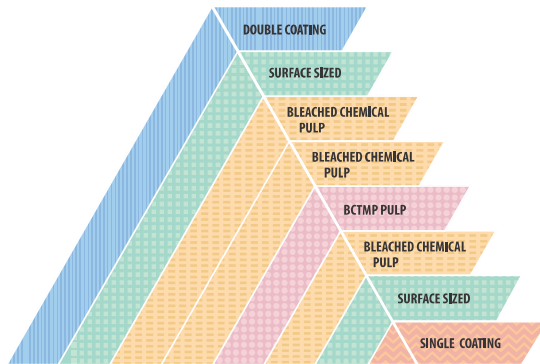

CERTIFICATIONS & COMPLIANCES:
Manufacturing: ISO 9001, ISO 14001, OHSAS 18001 and FDA
Environmental: FSC COC and ECF.
Regulatory: REACH & ROHS

NOTE:
Test Conditions: Temperature 23 ± 1°C & Relative Humidity 50 ± 2%. (Tappi 402)
All Parameters are measured as per the relevant Tappi & ISO standards.

Being a dynamic organization, Century Pulp & Paper continuously evolving in response to customer requirement. The specification in this product catalogue are therefore subject to change. To learn more about our upgraded specification sheet contact: cppdel@centurypaper.org.in