


Substance (Inc. PE) g/m ²	Thickness micron	Bulk cc/gm	L & W Bending Resistance, mN		
			MD	CD	GM
T410	T 411		T 556		
215	340	1.58	140	72	100
245	390	1.59	220	110	156
255	405	1.59	260	130	184
265	425	1.60	280	150	205
295	475	1.61	390	205	283
305	495	1.62	441	239	325
315	515	1.63	550	295	403
335	545	1.63	615	335	454
345	565	1.64	651	352	479
355	583	1.64	701	379	515
365	602	1.65	751	406	552
395	650	1.65	901	480	658
405	670	1.65	971	517	709
415	685	1.65	1051	560	767
Tolerance : ± 3%	± 4%		± 15%		

Properties		UOM	Value
Roughness(PPS)	200 - 290 Gsm	μ	1.1 ± 0.2
	> 290 Gsm		1.2 ± 0.2
IGT Dry Pick(MV)	Top	%	1.2 ± 0.2
ISO Brightness	Top	%	85 ± 2
Gloss at 75°, min	Top	%	40
Scott Ply Bond		j/m ²	>150
Cobb ₆₀	Top	g/m ²	30 ± 5
Moisture	<250	%	6.0 - 7.0
	251 - 300		6.5 - 7.5
	>301		7.0 - 8.0
Poly Substance	Back	GSM	15 ± 1
Poly Adhesion Strength		Points	3 Min
Shade			Natural

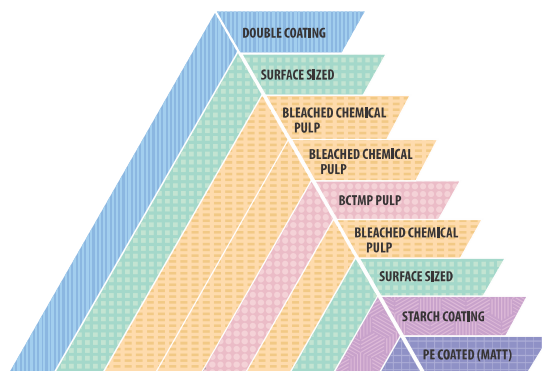

CERTIFICATIONS & COMPLIANCES:

Manufacturing: ISO 9001, ISO 14001, OHSAS 18001 and FDA
Environmental: FSC COC and ECF.
Regulatory: REACH & ROHS

NOTE:

Test Conditions: Temperature 23 ± 1°C & Relative Humidity 50 ± 2%. (Tappi 402)
All Parameters are measured as per the relevant Tappi & ISO standards.

Being a dynamic organization, Century Pulp & Paper continuously evolving in response to customer requirement. The specification in this product catalogue are therefore subject to change.
To learn more about our upgraded specification sheet contact: cppdel@centurypaper.org.in